ara 3

LED Light Bar

tri light®

- IP54 rated
- Energy efficient: around 40% more than alternative fluorescent tubes
- Fully linkable
- Available in 12 and 24V DC
- Slimline design
- Effective powerful illumination
- Suitable for shelving, refrigeration, cabinets, wall washing, headers, canopies, plinths, pelmets and coves
- Half life: L70 / 30,000 hours
- Linking leads available in 150mm, 300mm, 600mm and 1200mm lengths
- 5 years warranty
- Available in warm white, natural white, and daylight white colours
- Beam angles: 30°, 60° and 90°
- Lens available in clear and frosted

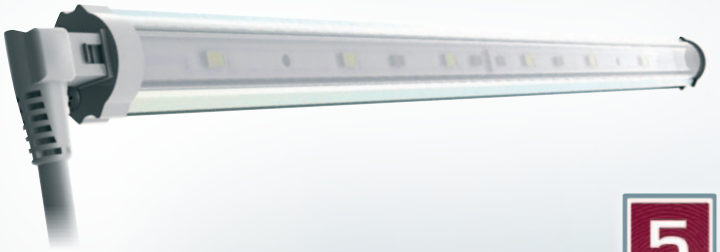

5 years warranty

Product code	Voltage	Length	Current (A)	Max. no. of linkable light bars
TRI-LB-ARA3-IP54-300-12	12V	300mm	0.26	11
TRI-LB-ARA3-IP54-500-12	12V	500mm	0.49	6
TRI-LB-ARA3-IP54-600-12	12V	600mm	0.52	5
TRI-LB-ARA3-IP54-900-12	12V	900mm	0.78	3
TRI-LB-ARA3-IP54-1000-12	12V	1000mm	0.98	3
TRI-LB-ARA3-IP54-1200-12	12V	1200mm	1.04	2
TRI-LB-ARA3-IP54-1500-12	12V	1500mm	1.47	2
TRI-LB-ARA3-IP54-1800-12	12V	1800mm	1.56	1

Product code	Voltage	Length	Current (A)	Max. no. of linkable light bars
TRI-LB-ARA3-IP54-300-24	24V	300mm	0.13	22
TRI-LB-ARA3-IP54-500-24	24V	500mm	0.245	11
TRI-LB-ARA3-IP54-600-24	24V	600mm	0.26	8
TRI-LB-ARA3-IP54-900-24	24V	900mm	0.39	7
TRI-LB-ARA3-IP54-1000-24	24V	1000mm	0.49	6
TRI-LB-ARA3-IP54-1200-24	24V	1200mm	0.52	5
TRI-LB-ARA3-IP54-1500-24	24V	1500mm	0.735	5
TRI-LB-ARA3-IP54-1800-24	24V	1800mm	0.78	3

Colour options	Colour temperature	Add to code
Warm white	3000K	-WW
Natural white	4000K	-NW
Daylight white	5000K	-DW

Lens type	Add to code
Clear	-C
Frosted	-F

Lens angle	Add to code
30 degree	-30
60 degree	-60
90 degree	-90

Interconnecting plugs

- +44 (0)1332 865777
- www.advancelighting.co.uk
- 76 Commerce Street, Melbourne, Derbyshire, UK. DE73 8GP

advance

LA The Lighting Association