

HB1 240,00 Lumen Highbay




- Product luminaires comply with EN60598 and are suitable for use in normal interior conditions.
- This luminaire has an ambient temperature range of -40°C to 50°C

1 Secure

Isolate mains power supply. ensure safety chain is secured as (shown in bold)

Ensure fixing method is strong enough to sustain the weight of the fitting.

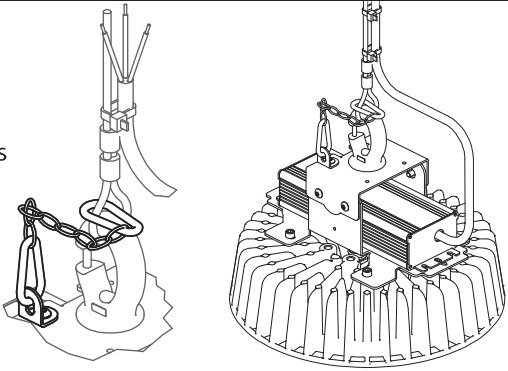


2 Wire

Terminate 3-core cable using suitable method (ensure IP rating is maintained if required).

Ensure Live, Earth and Neutral polarities are observed (see below)

Finally restore mains supply and test fitting's functionality

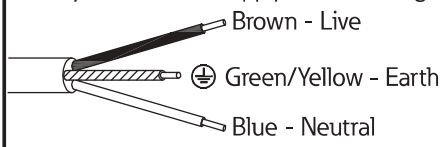


Safe Operation

1. Check the rating label for voltage and frequency before connecting this luminaire to the electrical supply.
2. Ensure that the mains supply is switched off when working on this luminaire, when installing or servicing.
3. Do not mount luminaire on or close to readily flammable materials. Minimum clearance 50mm
4. To prevent damage to driver, do not mix with conventional magnetic ballasts on the same electrical circuit.
5. Where use in more onerous situations is required, e.g. In part-completed buildings before "drying-out" is completed, or areas where ambient temperatures are outside the normal temperature range, then consult our Sales Office
6. The light source contained in this luminaire shall only be replaced by the manufacturer, his service agent or a similar qualified person.
7. Ensure product connections are suitably terminated


Servicing and Disposal

1. At commissioning and handing over of installation ensure that a copy of these instructions is presented to the authority responsible for the operation and maintenance of the luminaries.
2. Servicing, e.g. cleaning, must only be carried out after the electricity supply has been switched off. It must not be assumed that luminaries with lamps not lit are switched off-always check before servicing.
3. Cleaning should be carried out at regular intervals to ensure that dirt does not accumulate to an extent that will impair the thermal safety or optical performance of the luminaire. Regular cleaning will ensure that the optical performance of the luminaries is maintained.
4. At the end of life the luminaire is classed as WEEE under directive 2002/96/EC and should be disposed of in accordance with local legislation.
5. Ensure product is cleaned and kept free from debris at regular intervals. Build-up of debris on the back of the luminaire will degrade performance and may damage the product invalidating any warranty

Luminaire Cleaning



Luminaire Servicing



End of Life and Components Disposal

