


ara 3



Waterproof LED Light Bar

- ▶ IP67 rated
- ▶ Energy efficient: around 40% more than alternative fluorescent tubes
- ▶ Fully linkable
- ▶ Available in 12 and 24V DC
- ▶ Slimline design
- ▶ Effective powerful illumination
- ▶ Suitable for shelving, refrigeration, cabinets, wall washing, headers, canopies, plinths, pelmets and coves
- ▶ Half life: L70 / 30,000 hours
- ▶ Linking leads available in 150mm, 300mm, 600mm and 1200mm lengths
- ▶ 5 years warranty

- ▶ Available in warm white, natural white, and daylight white colours
- ▶ Beam angles: 30°, 60° and 90°
- ▶ Lens available in clear and frosted

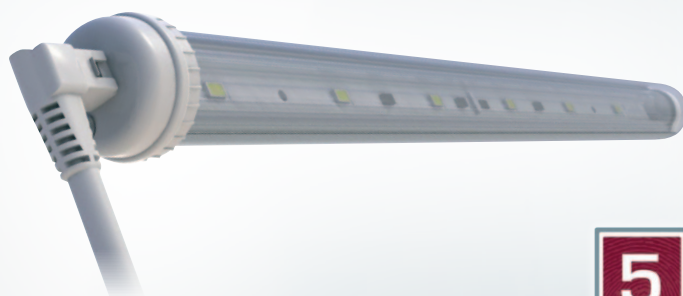

Product code	Voltage	Length	Current (A)	Max. no. of linkable light bars
TRI-LB-ARA3-IP67-300-12	12V	300mm	0.26	11
TRI-LB-ARA3-IP67-500-12	12V	500mm	0.49	6
TRI-LB-ARA3-IP67-600-12	12V	600mm	0.52	5
TRI-LB-ARA3-IP67-900-12	12V	900mm	0.78	3
TRI-LB-ARA3-IP67-1000-12	12V	1000mm	0.98	3
TRI-LB-ARA3-IP67-1200-12	12V	1200mm	1.04	2
TRI-LB-ARA3-IP67-1500-12	12V	1500mm	1.47	2
TRI-LB-ARA3-IP67-1800-12	12V	1800mm	1.56	1

Product code	Voltage	Length	Current (A)	Max. no. of linkable light bars
TRI-LB-ARA3-IP67-300-24	24V	300mm	0.13	22
TRI-LB-ARA3-IP67-500-24	24V	500mm	0.245	11
TRI-LB-ARA3-IP67-600-24	24V	600mm	0.26	8
TRI-LB-ARA3-IP67-900-24	24V	900mm	0.39	7
TRI-LB-ARA3-IP67-1000-24	24V	1000mm	0.49	6
TRI-LB-ARA3-IP67-1200-24	24V	1200mm	0.52	5
TRI-LB-ARA3-IP67-1500-24	24V	1500mm	0.735	5
TRI-LB-ARA3-IP67-1800-24	24V	1800mm	0.78	3

Colour options	Colour temperature	Add to code
Warm white	3000K	-WW
Natural white	4000K	-NW
Daylight white	5000K	-DW

Lens type	Add to code
Clear	-C
Frosted	-F

Lens angle	Add to code
30 degree	-30
60 degree	-60
90 degree	-90

Interconnecting plugs

