


APUS - High Bay

USER MANUAL

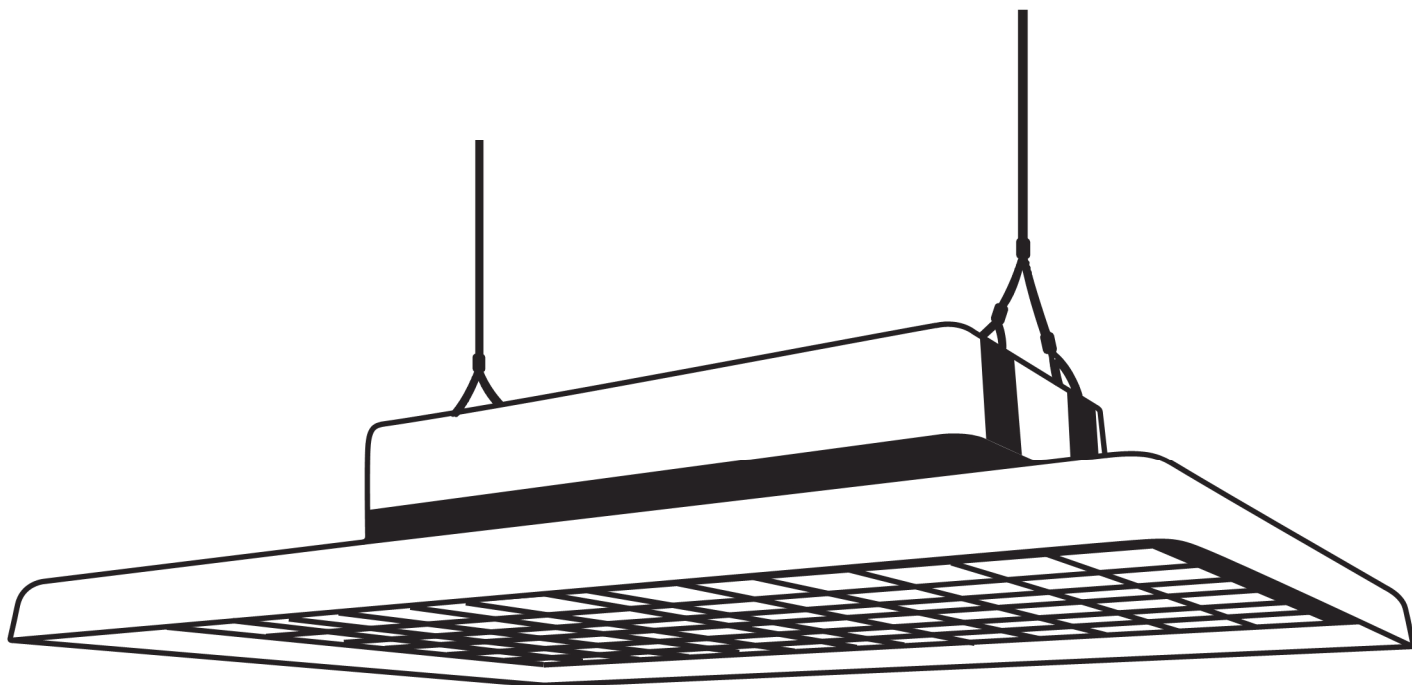

WARNING

Before carrying out any maintenance, make sure to disconnect the luminaire from the power supply. Any incidents that occur that haven't been made in accordance with this installation guide will be the responsibility of the installer. Replacement or maintenance of any component must be supplied or recommended by the manufacturer. The light source of the luminaire should only be replaced by Advance LED

High Bay

⚠ WARNING

Connection block included. Installation of the luminaire may require the intervention of a qualified person

SPECIFICATIONS

Electrical Power (W): From 60W to 360W

Voltage (V): 100~277V / 220~240V

Power Factor: 0,95

IP protection: 65

IK protection: 10

Electrical power class: Class 1

N.W / G.W: Dimensions (AxB):

60W: 4.1Kg / 4.5Kg & 362*257*120mm

100W: 4.1Kg / 4.5Kg & 362*257*120mm


120W: 4.4Kg / 5.0Kg & 415*310*120mm

150W: 5.8Kg / 6.5Kg & 487*362*120mm

200W: 5.8Kg / 6.5Kg & 487*362*120mm

300W: 7.5Kg / 8.7Kg & 720*365*130mm

360W: 7.5Kg / 8.7Kg & 720*365*130mm

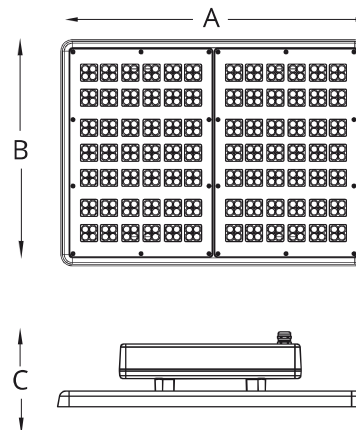

INSTALLATION

1. UNPACKAGING

Unpack the luminaire and check that all parts have not been damaged. If any damage is found, please leave the luminaire in it's packaging and contact us.

2. HANDLING


Do not stack luminaires after removal from the packaging as this could damage them.

⚠ WARNING





Do not hang luminaire directly from the power cord

3. INSTALLATION

The Apus luminaire is designed to be installed suspended or with the Apus wall bracket. Both options can be supplied with the luminaire.

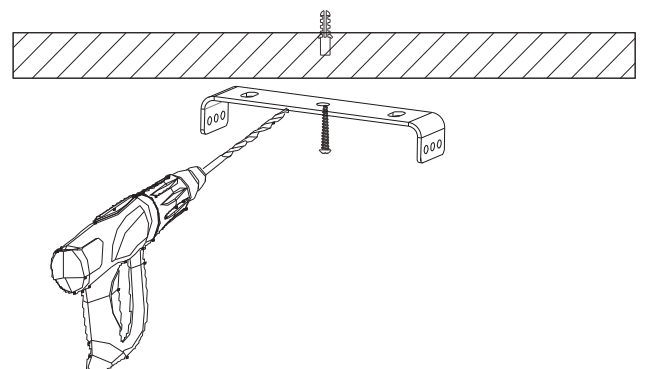

Lock the clip

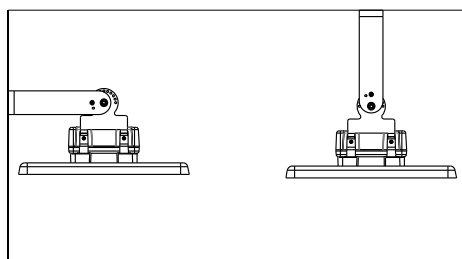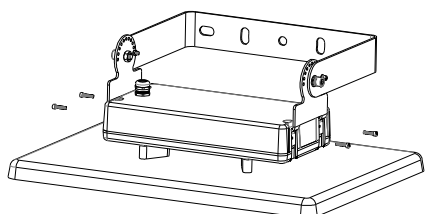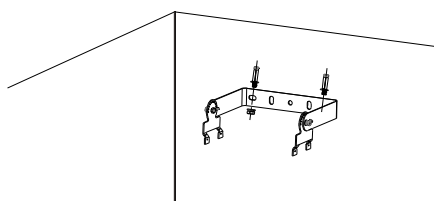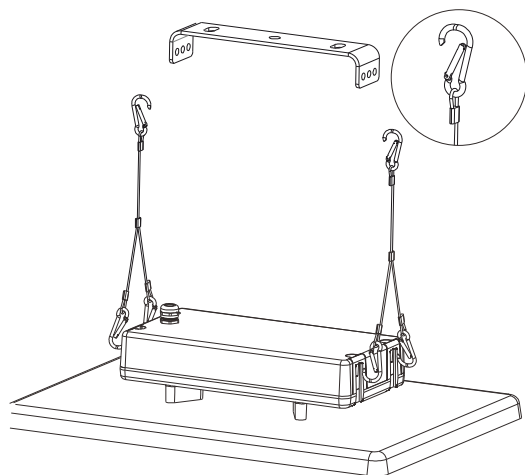



Check that the fixing is correct before connecting the wiring. If the luminaire is held securely, proceed with the connection of the luminaire to the power supply.

4. WIRING

Check that the supply voltage is correct and connect the power cables of the luminaire following the colour code as shown in the diagram.

⚠ WARNING


The flexible cable of the Apus luminaire cannot be replaced. If the cable is damaged, the luminaire must be destroyed

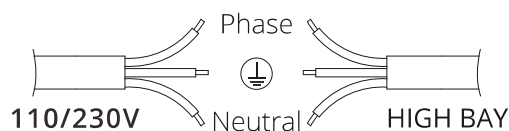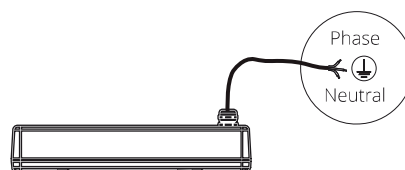

Connections

Cable colour:	Supply type:
Brown/Black	Phase
Yellow&Green/Green	Ground ⚡
Blue/White	Neutral

Make sure that the cable connection is correct. If it is then the final installation should look like the below.

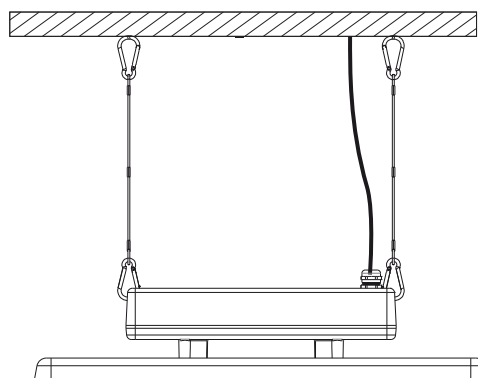

4. MAINTENANCE / CLEANING

To maintain the high efficiency of the Apus luminaire, it will need cleaning on the lens' surface. Use a soap with a neutral pH and a cloth to clean and dry it