

# EMA & EMB

Surface mount emergency downlight

## Key features

- Material: White Polycarbonate body
- Lumen output: 390lm, 600lm
- IP rating: IP65 (circular) & IP41 (square)
- 50,000 hours
- Warranty: 5 years
- Driver: Maintained, Non-Maintained or as DALI Self-Test Non - Maintained

## Product information and code selector

### Emergency surface mount round

Product Code	Operating mode	Code	Lumens (lm)	Code	Wattage (W)	Code
EMA	Maintained	M	390	39	3	3
	Non-maintained	NM	390 600	39 60	3 6	3 6
	DALI Self-Test Non maintained	DSTNM	390	39	3	3




#### Code builder example: EMA M 39 3

(EMA = EMA surface round. M = Maintained. 39 = 390lm. 3 = 3W).

### Emergency surface mount square

Product Code	Operating mode	Code	Lumens (lm)	Code	Wattage (W)	Code
EMB	Maintained	M	390	39	3	3
	Non-maintained	NM	390	39	3	3
	DALI Self-Test Maintained	DSTM	390	39	3	3
	DALI Self-Test Non maintained	DSTNM	390	39	3	3

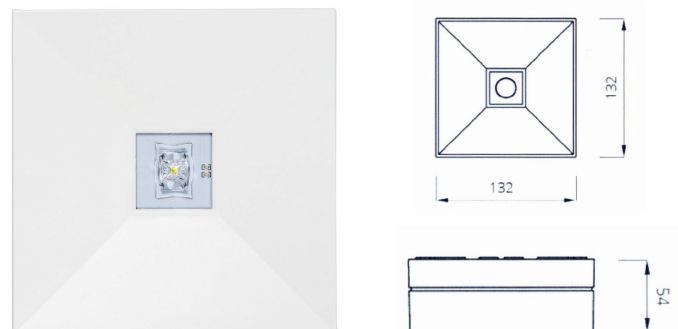

#### Code builder example: EMB M 39 3

(EMB = EMB surface mount square. M = Maintained. 39 = 390lm. 3 = 3W).