


EU BA

Basic emergency downlight

Key features

- LED emergency module suitable for direct installation in ceilings
- Complete set with integrated electronics, LED module, heat sink, optics and battery
- Includes click-in multi-lens for anti-panic, escape route and spot illumination
- Emergency lighting function for manual testing
- Small size ceiling hole, 40 - 43mm, 80mm height
- Output power: 0.75 - 1.5W
- Very low stand-by power loss
- Maintained and non-maintained variants
- 1 or 3 hour rated duration (separate variants)
- Plug -in Lithium Iron Phosphate battery with strain-relief
- 5 years guarantee electronic (LED driver)
- 3 years guarantee

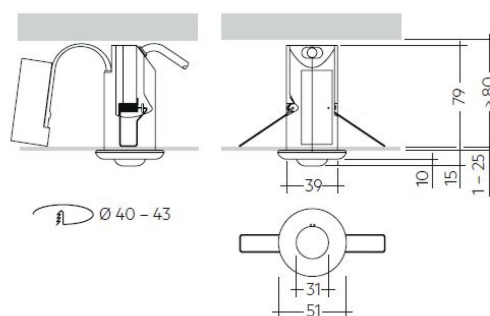

Product information and code selector

Emergency surface mount round

Product Code	Operating mode	Code	Wattage (W)	Code
EU BA	3 hour Non-maintained	NM	0.75	1
			1.5	2
	3 hour Maintained	M	1.5	2

Code builder example: EU BA NM 1

(EU BA = Basic emergency downlight. NM = 3 hour Non-maintained. 1 = 1W).