

Pendant PEA, PEB, PEC & PED

LED pendant



i Key features


- Material: Aluminium
- Nominal lumens: 3400lm max
- CCT: 2700K, 3000K, 4000K
- Beam angle: 15° to 45°
- 50,000 hours
- Warranty: 5 years
- Colour options: White
- Control: DALI, Analogue, Phase



Product information and code selector


ø30 at cylinder

| Product code | COB | Code | Nominal lumens (lm) | Code | Kelvin (K) | Code | CRI | Code | Beam angle | Code | Colour | Code | Control | Code |
|--------------|------|------|---------------------|------|------------|------|-----|------|------------|------|--------|------|--------------------------------------|----------|
| PEA | Cree | CR | 400 | 04 | 2700 | 27 | 80 | 80 | 30° | 30 | White | WH | Non Dim DALI Analogue Phase | ND |
| | | | | | 3000 | 30 | | | | | | | | DL |
| | | | | | 4000 | 40 | | | | | | | | AN PH |




ø45 at cylinder

| Product code | COB | Code | Nominal lumens (lm) | Code | Kelvin (K) | Code | CRI | Code | Beam angle | Code | Colour | Code | Control | Code |
|--------------|------|------|---------------------|------|------------|------|-----|------|------------|------|--------|------|--------------------------------------|----------|
| PEB | Cree | CR | 800 | 08 | 2700 | 27 | 80 | 80 | 36° | 36 | White | WH | Non Dim DALI Analogue Phase | ND |
| | | | | | 3000 | 30 | | | | | | | | DL |
| | | | | | 4000 | 40 | | | | | | | | AN PH |




ø60 at cylinder

| Product code | COB | Code | Nominal lumens (lm) | Code | Kelvin (K) | Code | CRI | Code | Beam angle | Code | Colour | Code | Control | Code |
|--------------|------|------|---------------------|------|------------|------|-----|------|------------|------|--------|------|--------------------------------------|----------|
| PEC | Cree | CR | 1000 | 10 | 2700 | 27 | 80 | 80 | 18° | 18 | White | WH | Non Dim DALI Analogue Phase | ND |
| | | | | | 3000 | 30 | | | 24° | 24 | | | | DL |
| | | | | | 4000 | 40 | | | 36° | 36 | | | | AN PH |



ø95 at cylinder

| Product code | COB | Code | Nominal lumens (lm) | Code | Kelvin (K) | Code | CRI | Code | Beam angle | Code | Colour | Code | Control | Code |
|--------------|------|------|---------------------|------|------------|------|-----|------|------------|------|--------|------|--------------------------------------|----------|
| PED | Cree | CR | 3400 | 34 | 2700 | 27 | 80 | 80 | 15° | 15 | White | WH | Non Dim DALI Analogue Phase | ND |
| | | | | | 3000 | 30 | | | 30° | 30 | | | | DL |
| | | | | | 4000 | 40 | | | 45° | 45 | | | | AN PH |



Code builder example : **PEA CR 04 27 80 30 WH ND**

(PEA = Pendant PEA. CR = Cree chip. 04 = 400lm. 27 = 2700K. 30 = 30 deg. WH = White. ND = Non Dim.)

March 2018. Issue 1


Pendant PEA, PEB, PEC & PED

LED pendant




Polar Curve

CREE COB 6W-30°




PEA

CREE COB 8W-36°




PEB


CREE COB 14W-18°

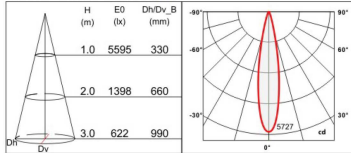

CREE COB 14W-24°

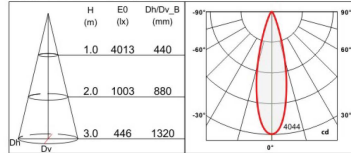


CREE COB 14W-36°

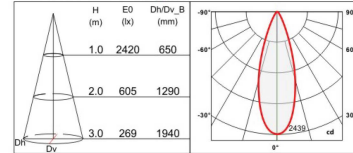


PEC


CREE COB 28W-15°



CREE COB 28W-30°



CREE COB 28W-45°



PED