


Mini linear L0 series

Key features

- Material: Aluminium
- Nominal output: 130lm, 250lm, 650lm, 1300lm, 2000lm
- CCT: 2700K, 3000K, 4000K
- Beam angle: 15°, 30°, 45°
- 50,000 hours
- Warranty: 5 years
- Colour: White
- IP rating: IP20
- Control: Non Dim, DALI, Analogue, Phase

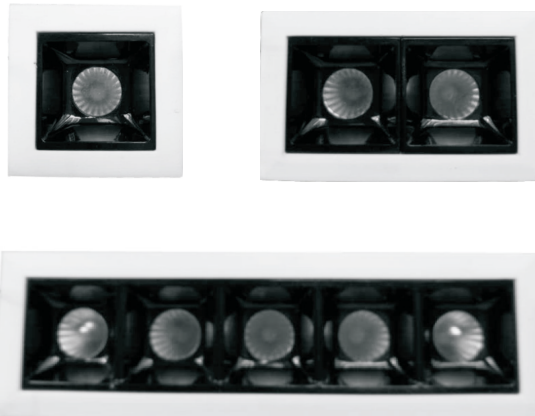

Product information and code selector


Product code	Nomimal lumens (lm)	Code	Kelvin (K)	Code	CRI	Code	Beam angle	Code	Colour	Code	Control	Code
L01	130	01	2700	27	80 90	80 90	15°	15	White	WH	Non Dim	ND
			3000	30			30°	30			DALI	DL
			4000	40			45°	45			Analogue	AN
											Phase	PH
L02	250	02	2700	27	80 90	80 90	15°	15	White	WH	Non Dim	ND
			3000	30			30°	30			DALI	DL
			4000	40			45°	45			Analogue	AN
											Phase	PH
L05	650	06	2700	27	80 90	80 90	15°	15	White	WH	Non Dim	ND
			3000	30			30°	30			DALI	DL
			4000	40			45°	45			Analogue	AN
											Phase	PH
L10	1300	13	2700	27	80 90	80 90	15°	15	White	WH	Non Dim	ND
			3000	30			30°	30			DALI	DL
			4000	40			45°	45			Analogue	AN
											Phase	PH
L15	2000	20	2700	27	80 90	80 90	15°	15	White	WH	Non Dim	ND
			3000	30			30°	30			DALI	DL
			4000	40			45°	45			Analogue	AN
											Phase	PH

Code builder example : **L01 01 27 80 15 WH ND**

(L01 = 1 LED mini linear fitting, 01 = 130lm, 27 = 2700K, 80 = 80 CRI, 15 = 15 degrees, WH = White, ND = Non Dim.)

Mini linear L0 series


L01 - 1 LED fitting

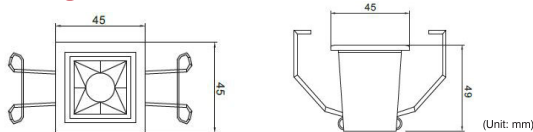


Cut out Diameter



37×37mm

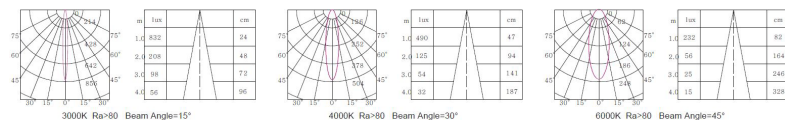


L02 - 2 LED fitting

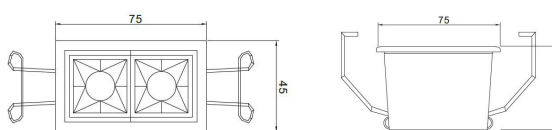


Cut out Diameter



68×37mm

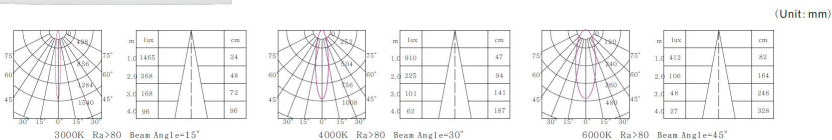


L05 - 5 LED fitting

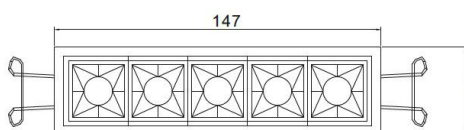


Cut out Diameter



140×37mm




L10 - 10 LED fitting

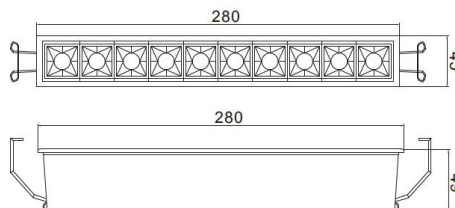

Cut out Diameter




273×37mm



(Unit: mm)


L15 - 15 LED fitting

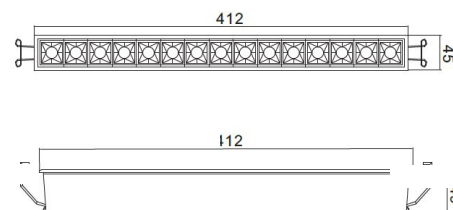

Cut out Diameter



405×37mm



(Unit: mm)

March 2018, Issue 1