Hydra



Advance LED Lighting Solutions new Hydra luminaire is an IP65 rated non-corrosive linear fitting with an IK08 rating. Offering fast fixing mounting clips with no need to drill into the housing for installation. The Hydra comes with a polycarbonate housing and a heat resistant opal secured with anti-tamper diffuser clips delivering giving the Hydra a uniformly lit appearance.

Not suitable for installation on vertical surfaces.




- Colour temperature 4000°K
- Operating temperature (range): -25° to +25°C
- CRI:>80
- IP rating: IP65
- L70 59,000 hours
- Warranty 3 Years
- Wattage: 41W & 82W
- Impact rating IK08
- Emergency available with the 1200mm version.
 Add suffix 'EM' to end of part code.



Product information and code selector


Product					Colour					
code	Dimensions	Code	Lumens	Code	Temperature (°K)	Code	CRI	Code	Colour	Code
BA4	1200	12	4800	48	4000	40	>80	80	GR	GR
	1800	18	9300	93						

Code builder example: BA4 12 48 40 80 GR



L: 1265mm x W:165mm x D:110mm x B: 907mm

L: 1865mm x W:165mm x D:110mm x B: 1170mm

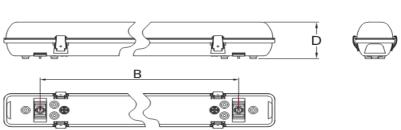

January 2021. Issue 1