


Advance LED Lighting Solutions new Aquila weatherproof offers brilliant efficiency of 127 lumens per Watt and 135 lumens per Watt for the 7000 lumen version. Manufactured with a polycarbonate base and an opal polycarbonate diffuser the Aquila offers an IP65 rating for use in most industrial applications. Lifetime is 50,000 hours to L70 with an output of 2400 to 7000 lumens. The Aquila weatherproof comes complete with Tridonic driver.

Not suitable for wall mounting unless under a canopy

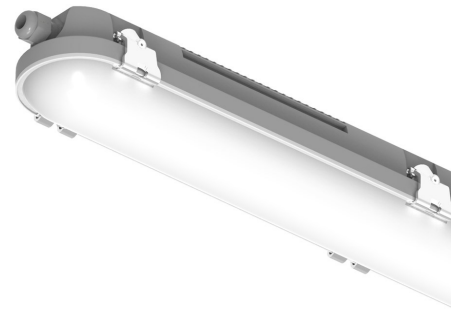

## Key features

- Colour temperature 4000°K
- Operating temperature (range): -10° to +40°C (Emergency variants: 0° to +40°C)
- CRI: >80
- IP rating: IP65
- L70 50,000 hours
- Warranty 3 Years
- Wattage: 18W, 30W, 37W & 50W
- Impact rating IK08
- Suitable with batten fit sensor

## Product information and code selector

Product code	Luminous Flux (lm)	Code		Colour		Code	Colour	Code	Driver	Code
		Code	Power	Code	Temperature (°K)					
BA5	2400	24	18W	18	4000	40	Grey	GR	Standard	ST
	3800	38	30W	30					DALI	DD
	4750	47	37W	37					Emergency	EM
	7000	70	50W	52						



4750 lumens (Single): L: 1190mm x LF: 818mm x W: 95mm x H: 75mm  
 3800 lumens (Single): L: 1490mm x LF: 1018mm x W: 73mm x H: 75mm  
 4750 lumens (Double): L: 1190mm x LF: 818mm x W: 95mm x H: 75mm  
 7000 lumens (Double): L: 1490mm x LF: 1018mm x W: 95mm x H: 75mm