

Advance LED Lighting Solutions new batten type offers excellent light transmission and LED source obscurity from the reeded opal diffuser. Supplied with a first fix plate and heatsink powder coated in an RAL9016 finish. Lifetime is 90,000 hours to L70 with an output of 6000 lumens and power consumption of 46 Watts. Suitable for direct fixing, trunking, conduit or chain/wire suspension.

Available with an emergency option.




Key features

- Colour temperature 4000°K
- Operating temperature (range): -10° to +25°C
- CRI: >80
- IP rating: IP20
- L70 90,000 hours
- Warranty 5 Years
- Wattage: 46W
- Impact rating IK07
- Emergency available. Add suffix 'EM' to end of part code

Product information and code selector

Product code	Dimensions	Luminous Code	Flux (lm)	Colour Code	Temperature (°K)	CRI Code	CRI	Code	Colour	Code	Driver	Code
BC1	1200mm	12	6000	60	4000	40	>80	80	White	WH	Non-dimmable	ND

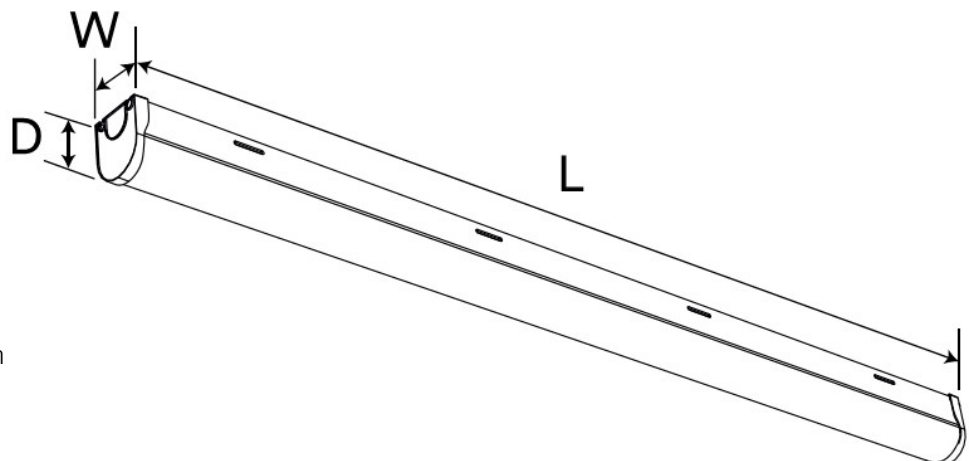

L: 1163mm x W:62mm x H:76mm

Emergency version - L: 1318mm

November 2022.