


Wallpack- Sculptor

Data sheet

Key technical attributes include:

- 15 or 25 Watts
- 1500 or 2500 lumen output
- IP rating: IP65
- L70 60,000 hours
- Warranty 5 Years
- 3000 or 4000°K colour temperature
- 3-hour emergency back-up option

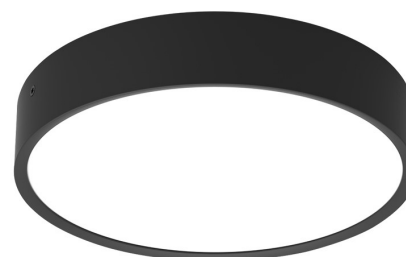

Product Name	Sculptor	Sculptor	Sculptor	Sculptor
Advance Part code	WP5 15 15 40 BL ST	WP5 15 15 40 BLE M	WP5 25 25 40 BL ST	WP5 25 25 40 BLE M
Description	Circular decorative wallpack, suitable for wall or ceiling mount with black bezel, diameter 300mm. Power 15W, 1500 lumens, 3/4000°K colour temperature, non-dimmable.	Circular decorative wallpack, suitable for wall or ceiling mount with black bezel, diameter 300mm. Power 15W, 1500 lumens, 3/4000°K colour temperature, non-dimmable, emergency version.	Circular decorative wallpack, suitable for wall or ceiling mount with black bezel, diameter 350mm. Power 25W, 2500 lumens, 3/4000°K colour temperature, non-dimmable.	Circular decorative wallpack, suitable for wall or ceiling mount with black bezel, diameter 350mm. Power 25W, 2500 lumens, 3/4000°K colour temperature, non-dimmable, emergency version.
Nominal Voltage (V)	230	230	230	230
Power (W)	14	16	22	24
Lumen output	1500	1500	2500	2500
Lumens/Watt	107.1	93.8	113.6	104.2
Life expectancy	60,000 Hours to L70	60,000 Hours to L70	60,000 Hours to L70	60,000 Hours to L70
Colour temperature (°K)	3/4000°K	3/4000°K	3/4000°K	3/4000°K
CRI	80	80	80	80
Macadam ellipses	<6	<6	<6	<6
Power factor	0.9	0.9	0.9	0.9
Running Current (A)	0.06	0.07	0.10	0.10
Inrush current	10Amps for 100µS	10Amps for 100µS	20Amps for 100µS	20Amps for 100µS
Emergency lumen output	N/A	150	N/A	150
Insulation Class	2	2	2	2
IP rating	65	65	65	65
IK rating	10	10	10	10
Qty per type C 10 amp breaker	27	27	24	24
Operating temperature	5 to +40°C	5 to +40°C	5 to +40°C	5 to +40°C
Warranty	5 years	5 years	5 years	5 years
Gross weight (Kg)	1.3	1.8	1.8	2.3
Nett weight (Kg)	1	1.5	1.5	2

