

Advance LED Lighting Solutions new asymmetrical Taurus floodlight offers a multitude of different lumen outputs to suit a varied range of applications. Manufactured from die-cast aluminium and tempered glass, the body of the luminaire is dust tight and low pressure water jet proof. Lifetime is 100,000 hours to L90 with output options of 8000 lumens up to 31000 lumens and efficiency up to 159 lumens per Watt.. Supplied in dark grey.




Key features

- Colour temperature 4000°K
- Up to 159 lumens/Watt
- Operating temperature (range): -20° to +40°C
- CRI: >70
- IP rating: IP65
- L90 100,000 hours
- Warranty 5 Years
- Wattage: 50W, 70W, 100W, 150W & 200W
- Impact rating IK08

Product information and code selector

Code	Power (W)	Luminaire Lumens	CCT (K)	Weight (kg)	Optic	Dimensions (mm)		
						Length (L)	Width (W)	Height (H)
FL3001GRAS	50	7834	4000	1.9	High efficiency asymmetric	291	230	58
FL3002GRAS	70	10445	4000	2.8	High efficiency asymmetric	338	280	59
FL3003GRAS	100	15668	4000	3.6	High efficiency asymmetric	381	312	62
FL3004GRAS	150	22009	4000	3.6	High efficiency asymmetric	381	312	62
FL3005GRAS	200	31336	4000	7.6	High efficiency asymmetric	515	420	87
FLCONNECT01	N/A	N/A	N/A	N/A				

FLCONNECT01

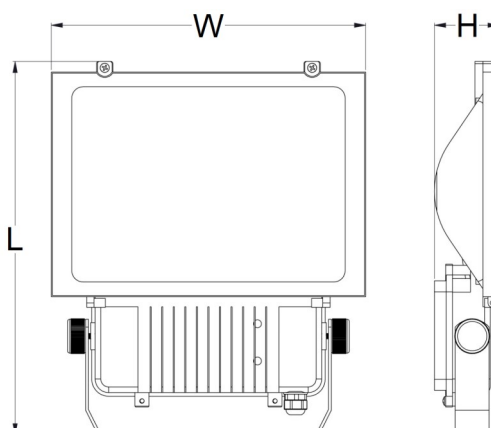

July 2023. Issue 1